

USB HUB & PoE PD HUB

AOK-HUB12AC10 Metal USB Hub 10Gbps 2x Type A + 2x Type C, with Type A to C Adapter Cable

- Specification**
 - 1x integrated USB-C cable with Type A adapter
 - 2x Type C (data only) with up to 10Gbps
 - 2x Type A port with up to 10Gbps
 - LED indication
 - Dimensions: L110*W30*H10mm
 - Weight: 42g



- Package** Color box, hub, user manual

AOK-HUB12AC USB C Metal HUB 2x USB 3.0 + 2x USB-C, with integrated Type A to C cable

- Specification**
 - Transfer Rate: Up to 5.0 Gb/s
 - 1x integrated USB-C cable to USB A cable for connection to host
 - 2x USB-C port (data only)
 - 2x USB 3.0 port
 - LED indication
 - Dimensions: L110*W30*H10mm
 - Weight: 46g



- Package** Color box, hub, user manual

AOK-HUB12C USB C Metal HUB 2x USB 3.0 + 2x USB-C

- Specification**
 - Transfer Rate: Up to 5.0 Gb/s
 - 1x integrated USB-C cable for connection to host
 - 2x USB-C port (data only)
 - 2x USB 3.0 port
 - LED indication
 - Dimensions: L110*W30*H10mm
 - Weight: 42g



- Package** Color box, hub, user manual

AOK-HUB29C Metal USB 3.2 Gen 2 10Gbps Hub 4x Type C

- Specification**
 - 1x integrated USB-C cable for host
 - 4x Type C (data only) with up to 10Gbps
 - LED indication
 - Dimensions: L110*W30*H10mm
 - Weight: 42g



- Package** Color box, hub, user manual

AOK-HUB2A2CP USB 3.2 Gen2 10Gbps 4 Port Hub + PD 100W

- Specification**
 - 1x integrated USB-C cable for host
 - 2x USB-C Gen2 with transfer rate up to 10Gbps
 - 2x USB 3.0 port with transfer rate up to 5Gbps
 - 1x USB C PD3.0 up to 100W
 - LED indication
 - Dimensions: W45*H15.7*L100mm



- Package** Color box, hub, user manual

AOK-HUB2A5CP USB 3.2 Gen2 10Gbps 7 Port Hub + PD 100W

- Specification**
 - Material: Aluminum
 - 1x integrated USB-C cable for host
 - 5x USB-C Gen2 with transfer rate up to 10Gbps
 - 2x USB 3.0 port with transfer rate up to 5Gbps
 - 1x USB C PD3.0 up to 100W
 - Dimensions: W45*H15.7*L156mm



- Package** Color box, hub, user manual

AOK-HUB2A8CP USB 3.2 Gen2 10Gbps 10 Port Hub + PD 100W

- Specification**
 - Material: Aluminum
 - 1x integrated USB-C cable for host
 - 2x USB-C Gen2 with transfer rate up to 10Gbps
 - 8x USB 3.0 port with transfer rate up to 5Gbps
 - 1x USB C PD3.0 up to 100W
 - Dimensions: W45*H15.7*L212mm



- Package** Color box, hub, user manual

USB HUB & PoE PD HUB


AOK-TPHUB04	Industrial Mountable 4-Port USB 3.0 Charging Hub	Industrial
Specification	4 x USB 3.0 Type A up to 5.0 Gbps transfer rate ESD and surge protection LED indicator lights for power and connection Dimensions: 90 x 68 x 28 mm Weight: 128g	
Package	Color box, 12V Power adapter, manual, USB 3.0 cable 1m, mounting kit	
AOK-TPHUB07	Industrial Mountable 7-Port USB 3.0 Charging Hub	Industrial Grade
Specification	7 x USB 3.0 Type A up to 5.0 Gbps transfer rate ESD and surge protection LED indicator lights for power and connection Dimensions: 127 x 68 x 28 mm Weight: 180g	
Package	Color box, 12V Power adapter, manual, USB 3.0 cable 1m, mounting kit	
AOK-TPHUB10	Industrial Mountable 10-Port USB 3.0 Charging Hub	Industrial Grade
Specification	10 x USB 3.0 Type A up to 5.0 Gbps transfer rate ESD and surge protection LED indicator lights for power and connection Dimensions: 164 x 68 x 28 mm Weight: 256g	
Package	Color box, 20V 3A Power adapter, manual, USB 3.0 cable 1m, mounting kit	
AOK-TPHUB13	Mountable Metal 13-Port USB 3.0 Charging Hub	Industrial Grade
Specification	13 x USB 3.0 Type A up to 5.0 Gbps transfer rate ESD and surge protection LED indicator lights for power and connection Dimensions: 200 x 68 x 28 mm Weight: 288g	
Package	Color box, 20V 4A Power adapter, manual, USB 3.0 cable 1m, mounting kit	
AOK-TPHUB16	Industrial Mountable 16-Port USB 3.0 Charging Hub	Industrial Grade
Specification	16 x USB 3.0 Type A up to 5.0 Gbps transfer rate ESD and surge protection LED indicator lights for power and connection Dimensions: 237 x 68 x 28 mm Weight: 327g	
Package	Color box, 20V 4.8A Power adapter, manual, USB 3.0 cable 1m, mounting kit	
AOK-CR01U3	All-in-one USB 3.0 Card Reader + Hub Combo	
Specification	Exclusive docking design, with detachable cable, best choice for office Material: ABS and Metal Dimensions: 85 x 40 x 45 mm (L x W x H) Weight: 0.30 lbs / 140g Interface: Micro USB USB 3.0 3 x USB 3.0 Type A, with Data Transfer Rate Up to 5.0 Gbps Support: M2 / MS / SD / MMC / TF / CF Flash Card Reader simultaneously	
Package	Folding Double Blister, Hub, 0.8m USB3.0 Cable or Type C cable	
AOK-CR02U3	All-in-one USB C to USB 3.0 Hub Combo with Card Reader, HDMI, Ethernet & PD	
Specification	Material: ABS and Metal 3x USB 3.0: data transfer rate up to 5.0 Gbps 1x HDMI: 4K@30Hz 1x Ethernet port: RJ45, 10/100/1000 Mbps 3x Card reader slots support: SD/TF/CF Flash card 1x Type C PD charging port 1x USB C port for connecting PC or tablets via Type C cable Dimensions: 85 x 40 x 45 mm (L x W x H) Weight: 140g	
Package	Folding Double Blister, Hub, 0.8m USB C Cable	

USB HUB & PoE PD HUB

AOK-HUB32AC USB C/A to 7 Port USB Hub with Type C Power Input

- Specification**
 - Dual Type C and Type A Male cable for host
 - 5x USB 3.0 Type A with up to 5Gbps transfer rate
 - 2x USB C data port with up to 5Gbps transfer rate
 - Power port: Type C 5V Input
 - L157*W30*H21mm


- Package**
 - Color box, hub, user manual



AOK-HUB31C USB C 7 Port USB 3.0 Hub with Type C Power Input

- Specification**
 - Material: Aluminum
 - Interface: 7x USB 3.0 Type A up to 5Gbps
 - Power port: Type C 5V Input
 - L157*W30*H21mm

- Package**
 - Color box, hub, user manual



AOK-HUB22C USB 3.2 Gen 1 Type-C Adapter PD 100W

- Specification**
 - 2x USB 3.0: data transfer rate up to 5.0 Gbps
 - 1x HDMI: 4K@60Hz
 - 1x USB C PD charging port, 100W, also support data transfer up to 5Gbps
 - 1x USB C port for connecting PC or tablets via Type C cable
 - Dimensions: 85 x 40 x 45 mm (L x W x H)
 - Weight: 70g

- Package**
 - Folding Double Blister, Hub, 0.8m USB C Cable



AOK-HUB22CG USB 3.2 Gen 1 Type-C Adapter PD 100W+ GLAN

- Specification**
 - 2x USB 3.0: data transfer rate up to 5.0 Gbps
 - 1x HDMI: 4K@60Hz
 - 1x Type C PD charging port, 100W, also support data transfer up to 5Gbps
 - 1x USB C port for connecting PC or tablets via Type C cable
 - 1x RJ45 10/100/1000Mbps connection
 - Dimensions: 85 x 40 x 45 mm (L x W x H)

- Package**
 - Folding Double Blister, Hub, 0.8m USB C Cable



AOK-HUB28AC USB C Hub 3 Port + Gigabit Ethernet, integrated Type C to A Adapter Cable

- Specification**
 - 3x USB 3.0 Type-A ports
 - 1x USB C data port
 - 1x Ethernet GLAN RJ-45 port
 - Product dimensions: 96 x 30 x 21 mm

- Package**
 - Color box, hub, user manual



AOK-HUB13C USB Type C 4-port USB hub, Aluminum

- Specification**
 - 1x integrated USB-C cable for connecting to the host device
 - Output interface: 4 USB 3.0 type-A ports
 - Product dimensions: 96 x 30 x 21 mm
 - Product weight: 63 g

- Package**
 - Color box, hub, user manual



AOK-HUB14CG USB Type C hub 3 Port + Gigabit Ethernet Adapter, Aluminum

- Specification**
 - 1x integrated USB-C cable for connecting to the host device
 - 3x USB 3.0 type-A ports
 - 1x Ethernet GLAN RJ-45 port
 - Product dimensions: 96 x 30 x 21 mm
 - Product weight: 63 g

- Package**
 - Color box, hub, user manual



USB HUB & PoE PD HUB

AOK-HUB30AC Type A/Type C Dual Head to Type C and 3x USB A Hub

- Specification**
 - 1x integrated USB-A/USB-C cable for connection to host
 - 1x USB Type C with up to 5Gbps transfer rate
 - 3x USB 2.0 with up to 480Mbps transfer rate
 - OS: Windows 7 / 8 / 8.1 / 10/11, macOS, Linux, Android, Chrome OS, iPadOS
 - Product dimensions: 100 x 17 x 7 mm

- Package** Color box, hub, manual



AOK-HUB30C Ultra-Slim Metal Type C to Type C and 3 USB A Hub

- Specification**
 - 1x integrated USB C cable for connection to host
 - 1x USB Type C with up to 5Gbps transfer rate
 - 3x USB 2.0 with up to 480Mbps transfer rate
 - Product dimensions: 100 x 17 x 7 mm
 - Product weight: 20 g

- Package** Color box, hub, manual



AOK-HUB4UC Ultra-Slim Metal Type C to 4 port USB3.0 Hub

- Specification**
 - 1x integrated USB C cable for connection to host
 - 4x USB 3.0 with up to 5Gbps transfer rate
 - Product dimensions: 100 x 17 x 7 mm
 - Product weight: 20 g

- Package** Color box, hub, manual



AOK-HUB01CP USB 3.1 (Gen1) Type C to PD & 4-port USB hub

- Specification**
 - Material: Plastic
 - Input: USB 3.1 Type-C
 - Output: 4x USB 3.0 and 1x type C PD 60W
 - Dimensions: L110*W30*H10mm
 - Weight: 40g

- Package** Color box, hub, user manual



AOK-HUB01CPR Type C to PD 3-port USB hub with card reader

- Specification**
 - Transfer Rate: Up to 5 Gb/s
 - Output: 3x USB 3.0, 1x type C PD & card reader
 - Dimensions: L110*W30*H10mm
 - Weight: 40g

- Package** Color box, hub, user manual



AOK-4UQ31 Aluminum 4-Port USB 3.0 Hub + 1 QC Fast Charging Port

- Specification**
 - 4x USB 3.0 port with up to 5Gbps transfer rate, hot Plug and Plug & Play
 - 1x DC 12V input
 - 1x QC3.0 quick charging port with 5V3A, 9V2A, 12V1.5A output
 - LED indicator for activity on all ports
 - Integrated overvoltage protection
 - Dimensions: 96.2x 68x 34.5mm
 - Weight: 91.8g

- Package** Color box, hub, user manual



AOK-7UQ31 Aluminum 7-Port USB 3.0 Hub + 1 QC Fast Charging Port

- Specification**
 - 7x USB 3.0 port with up to 5Gbps transfer rate, hot Plug and Plug & Play
 - 1x DC 12V input
 - 1x QC3.0 quick charging port with 5V3A, 9V2A, 12V1.5A output
 - LED indicator for activity on all ports
 - Integrated overvoltage protection
 - Dimensions: 141.2 x 68 x 34.5 mm
 - Weight: 125.5g


- Package** Color box, hub, user manual



AOK-10UQ31 Aluminum 10-Port USB 3.0 Hub + 1 QC Fast Charging Port

- Specification**
 - 10x USB 3.0 port with up to 5Gbps transfer rate, hot Plug and Plug & Play
 - 1x DC 12V input
 - 1x QC3.0 quick charging port with 5V3A, 9V2A, 12V1.5A output
 - LED indicator for activity on all ports
 - Integrated overvoltage protection
 - Dimensions: 186.2 x 68 x 35.25 mm
 - Weight: 168g

- Package** Color box, hub, user manual

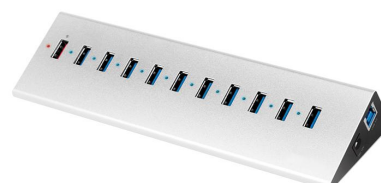

USB HUB & PoE PD HUB

AOK-HUB01C	USB 3.1 Type-C 4-port USB hub	<p>Specification</p> <p>Material: ABS 4 x USB 3.0 Type-A ports with up to 5 Gb/s transfer rate Dimensions: L110*W30*H10mm Weight: 40g</p> <p>Package</p> <p>Color box, hub, user manual</p>	 
AOK-HUB01CPG	Compact Aluminum USB C to 4 Port USB 3.0 Hub with PD 3.0 + Gigabit Ethernet	<p>Specification</p> <p>4x USB 3.0 Type A with up to 5Gbps transfer rate 1x USB C PD 3.0 1x RJ45 Gigabit Ethernet L140*W33*H15mm Weight: 88g</p> <p>Package</p> <p>Color box, hub, user manual</p>	
AOK-HUB24CG	USB C Metal 3-port hub with Gigabit Ethernet adapter	<p>Specification</p> <p>Portable and compact design, aluminium housing 3x USB 3.0 Type A female port Support data transfer rate up to 5 Gbps 1x RJ45 Gigabit ethernet port 10/100/1000 Mbps Dimensions: 94.4 × 27.7 × 16.8 mm Product weight: 50 g</p> <p>Package</p> <p>Giftbox, Adapter, User's manual</p>	 
AOK-HUB19CG	USB C 3-port hub with Gigabit Ethernet adapter	<p>Specification</p> <p>1x USB 3.0 (Type A) Male 1x RJ45 Female, 3x USB 3.0 Female Connection speed: 10/100/1000 Mbit/s Dimensions: 109 x 31 x 2 mm Weight: 50 g</p> <p>Package</p> <p>Giftbox, Adapter, User's manual</p>	 
AOK-HUB25	Mini USB 3.0 Metal 4 Port Hub	<p>Specification</p> <p>1x USB 3.0 built-in cable for connecting to the host device 4x USB 3.0 port with up to 5Gbps transfer rate Surge and overcurrent protection Product dimensions: 55 x 55 x 14 mm Product weight: 40 g</p> <p>Package</p> <p>Giftbox, hub, USB 3.0 cable, User's manual</p>	 
AOK-HUB17	USB 3.0 Metal Charging Hub 10 Port	<p>Specification</p> <p>1x USB 3.0 port for connecting to the host device 10x USB 3.0 port 1x Power input (DC 12V/4A) USB 3.0 cable (90 cm) Dimensions: 110 x 110 x 14 mm Weight: 150 g</p> <p>Package</p> <p>Giftbox, hub, USB 3.0 cable, User's manual, 12V 4A power adapter</p>	

USB HUB & PoE PD HUB

AOK-HUB18C	USB C 3-port hub with card reader	 
Specification	3x USB ports, transfer rate up to 5 Gbps Integrated card reader supports microSD/SD cards Cable length: 15 cm Product dimensions: 109 x 32 x 19 mm Product weight: 50 g	
Package	Giftbox, Adapter, User's manual	
AOK-AD01CG	USB-C Metal Gigabit Ethernet Adapter, Compact and portable	 
Specification	1x integrated USB-C cable for connecting to the host device 1x Ethernet GLAN RJ-45 port with speeds up to 1 Gbps Product dimensions: 61 x 23 x 17 mm Product weight: 35 g LED indication for power/Ethernet connection	
Package	Color box, adapter, user manual	
AOK-AD02CG	USB C to LAN Adapter 10/10/1000 Mbps	 
Specification	Material: ABS 1x USB-C 3.1 connector, for connecting to a laptop, tablet or PC Network Interface: Female RJ45 speed 10/100/1000 Mbps Dimensions: 60 x 22 x 16 mm Weight: 20 g	
Package	Color box, adapter, user manual	
AOK-POE01	USB-C to GLAN adapter, Power over Ethernet 15.4W	
Specification	USB-C Hub with PoE charging Power over Ethernet 15.4W Material: Aluminium 1 X USB 3.1 PD Type C Male Cable 1 X RJ45 Female POE, support IEEE802.3AT 10/100/1000 Mbps, Power up to 25W (15.4W optional) LED indication for Ethernet and Power connection Weight (hub): 70g	Power over Ethernet
Package	Giftbox, Adapter, User's manual	
AOK-HUB05C	USB 3.1 Type-C 4 Port Hub	 
Specification	Transfer Rate: Up to 5 Gb/s Material: aluminum Interface: USB 3.1 type-C Output: 4 USB 3.0 Type-A ports with maximum speed up to 5Gbps Overvoltage and current protection Weight: 71 g	
Package	Folding Double Blister, hub, 0.4m USB 3.1 Cable	
AOK-HUB06C	USB 3.1 Type-C 7-port USB hub	 
Specification	Material: aluminum & plastic Interface: USB type-C Output: 7 USB 3.0 type-A ports with maximum speed up to 5Gbps Dimensions: 183 x 37 x 18 mm Weight: 116g	
Package	Folding Double Blister, hub, 0.4m USB 3.1 Cable, 5V3A adapter	
AOK-HUB08C	Aluminium Alloy Powered USB C 7-port Hub	 
Specification	Material: Aluminum & plastic Input interface: USB 3.1 Type-C Output interface: 7 * USB 3.0 type-A ports Transfer rate: up to 5Gbps Dimensions: 95 x 35 x 18 mm	
Package	Colorbox, hub, 1* USB to DC Cable	
AOK-CR300	3-in-1 Type-C / USB 3.0 / Micro USB OTG SD and MicroSD Card Reader	
Specification	Material: Aluminum+ABS 3-in-1 connection design: USB 3.1 Type-C, USB 3.0, Micro USB, widely applicable for computers, tablets and mobile phones with different ports Transfer rate: up to 5Gbps in Type C and Type A Male Support both SD and Micro SD cards, can read simultaneously Dimensions: 77 x 22 x 12mm Weight: 17g	
Package	Color box, card reader	

USB HUB & PoE PD HUB

AOK-HUM013B

Dual 5Gbps Type-C + Type-A 3.5" Front Panel with 20-pin Header

Specification

Support USB 3.0 for maximum data transfer 5Gbps in Type C and Type A port
DC input port as alternative power option
High Quality metal bracket for rear side of the case
Connectors: 1x Type C, 1x USB 3.0 Port
Header Type: 20-Pin
Dimensions: W101.6 x H25.5 x L119.5mm



Package

Color box, 20-pin header cable 50cm, screws, user manual

AOK-MCR05

USB 3.0 / USB-C Hub with Card Reader Includes 1 USB-C Port, fit 5.25"

Specification

Fit any 5.25" computer case front bay
Backward compatible with USB 2.0/USB 1.0/USB 1.1
Interface: USB 3.0 / USB-C
Dimensions: 5 7/8" W x 1 11/16" H x 3" D
3 x USB 3.0
1 x eSATA Port, 3 x USB 3.0 Type-A Ports
1 x USB-C Port, 6 Slots Card Reader
Transfer Rate: Up to 5 Gbps
Support SD/MMC/SDHC, CF/CF II/HS CF/MD/MS/MS Duo/MS Pro, XD, TF, M2



Package

Color box, Cables , screws *5pcs

AOK-MHU07

7-Port USB 3.0 hub with 1 x fast charging port, fit 5.25"

Specification

Fit any 5.25" computer case front bay
Charging Current:2.1A
Material:ABS/Plastic
Interface:USB 3.0 Type-A
Backward compatible with USB 2.0/USB 1.1/USB 1.0
Dimensions:5 7/8" (W) x 1 3/5" (H) x 3" (D)
Output Interface:USB 3.0
Input Interface:7 x USB 3.0 Type-A Ports With Maximum Speed of up to 5 Gbps
Weight:0.35 lbs



Package

Color box, Cables , screws *5pcs

AOK-PCIE01G

Gigabit PCI Express network card

Specification

IEEE802.3, 802.3u, 802.3ab, 802.3x
Max. Transfer rate: 10/100/1000 MBit/s
In Full Duplex Mode up to 20/200/2000 MBit/s
Automatic speed detection
Port: 1x RJ45 female
FIFO(8K/64K) buffers
LED for Link/Activity



Package

Color box, user manual

AOK-PCIE02G

2-Port Gigabit LAN PCI-Express Card

Specification

Ports: 2x (RJ45) Gigabit Ethernet
Fully compliant with IEEE 802.3, 802.3u and 802.3ab
Supports full duplex flow control (IEEE 802.3x)
Supports IEEE 802.1P layer 2 Priority Encoding
Supports IEEE 802.1Q VLAN tagging
Supports WOL (Wake-On-LAN) function
Size: 120.0 x 92.6 x 21.5 mm (LxWxT)



Package

Color box, user manual